

## Configuration of Message Server on Liquid UI IOS

**Purpose:** Connecting to Message Server using Liquid UI IOS.

**Environment:**

SAPGUI 7.40, Patch Level 0

**Sample SAPGUI Connection:**

The screenshot shows the 'System Entry Properties' dialog box with the 'Connection' tab selected. The dialog has three tabs: 'Connection', 'Network', and 'Code Page'. The 'Connection' tab contains a text box with instructions: 'Choose the connection type and change the system parameters as required. Delete the old description if you want the system to propose a description. Button 'OK' is only active when all required input data has been entered.' Below this, there is a 'Connection Type' dropdown menu set to 'Group/Server Selection'. A section titled 'System Connection Parameters' contains several fields: 'Description' (text box with 'DESC'), 'System ID' (dropdown menu with 'TRX'), 'Message Server' (text box with 'JUNEAU'), 'SAProuter' (dropdown menu), 'Group/Server' (dropdown menu with 'DESIGNER'), and 'Instance Number' (text box). At the bottom of the dialog are three buttons: 'OK', 'Cancel', and 'Help'.

Field	Value
Connection Type	Group/Server Selection
Description	DESC
System ID	TRX
Message Server	JUNEAU
SAProuter	
Group/Server	DESIGNER
Instance Number	

**Environment:**

Liquid UI IOS version 2.0.16.0

**Sample LiquidUI IOS Connection:**

< Back

Connection Details

Not sure what to do?

Tap for help >

Description	Message Server
Application Server	/M/Juneau/S/3600/G/DESIGNER
Instance Number	00
Client	800
SAP Router String	
Username	
Password	
Single Signon	<input type="checkbox"/>
Language	
TLS	<input type="checkbox"/>
Autologon	<input type="checkbox"/>

Connect to My SAP

To Configure Message Server on Liquid UI IOS Provide your SAP Server Information and Click on **CONNECT TO MY SAP**. We need to Provide Message Server in below Format:

/M/JUNEAU/S/3600/G/DESIGNER

M -> Stands for Message Server

Juneau -> Message Server Name


S -> Stands for Service Port Number

Service Port Number is found in "services" file at below path on Machine Configured with Message Server

C:\Windows\System32\drivers\etc

Eg:- sapmsTRX 3600/TCP

TRX is the SAP SystemID and 3600 is the service port number.

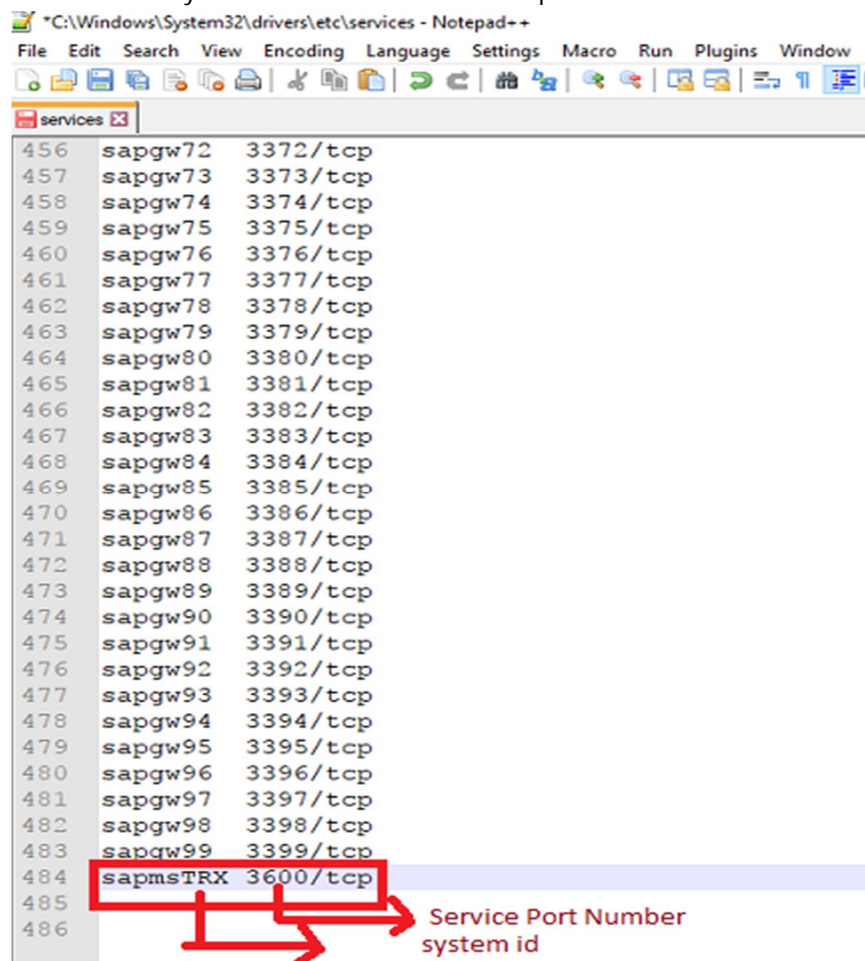

G -> Stands for Group Name

DESIGNER -> Name of the Group