

## Making a particular or multiple systems Active for script access

Purpose: To provide script access only for a particular or multiple system's by passing the system id's using the "enablesystem" option within the "guixt.sjs" file.

### Pre-Requisites:

Make sure that the SAPGUI is closed on the desktop before following these steps.

### Steps:

1. Locate the file "guixt.sjs" from the following path.

"C:\Program Files (x86)\SAP\FrontEnd\SAPgui"

2. Make the following entry to the file.


enablesystem = "SYSTEM ID"; – for single R/3 system.

Example: enablesystem = "TRT"; – means only TRT can access the scripts.

enablesystem ["SYSTEM ID", "SYSTEM ID"]; – for multiple R/3 systems.

Example: enablesystem ["TRT", "TTX"]; - means both these systems can access the scripts.

### Sample guixt.sjs file:

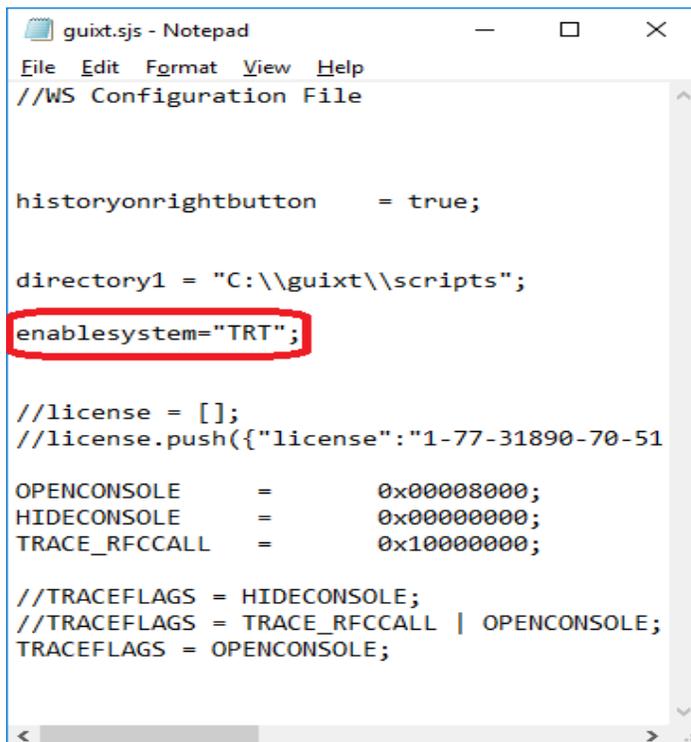

```
guixt.sjs - Notepad
File Edit Format View Help
//WS Configuration File

historyonrightbutton = true;



directory1 = "C:\\guixt\\scripts";
enablesystem="TRT";

//license = [];
//license.push({"license":"1-77-31890-70-51



OPENCONSOLE = 0x00008000;
HIDECONSOLE = 0x00000000;
TRACE_RFCCALL = 0x10000000;

//TRACEFLAGS = HIDECONSOLE;
//TRACEFLAGS = TRACE_RFCCALL | OPENCONSOLE;
TRACEFLAGS = OPENCONSOLE;
```

Before changes TRT vs TTX:

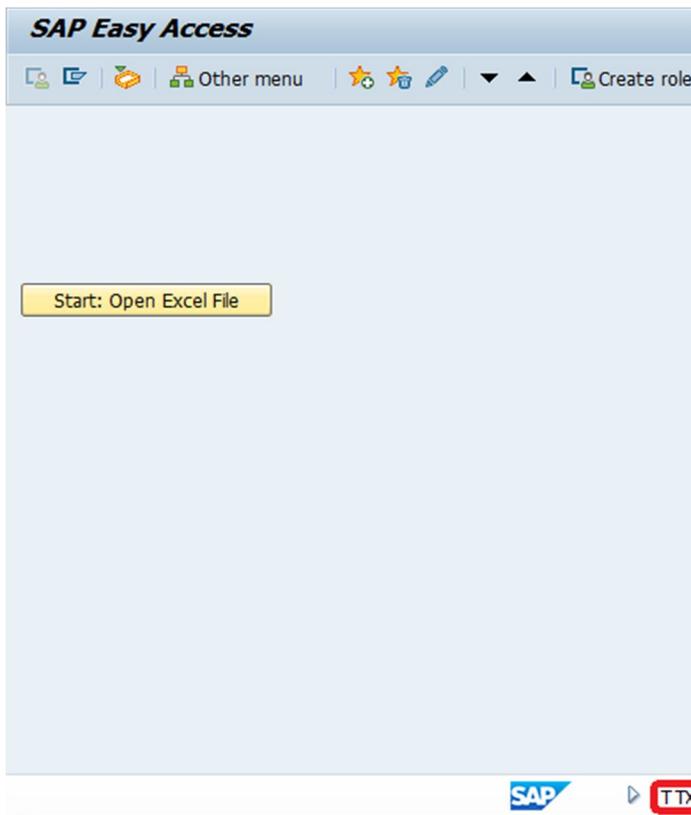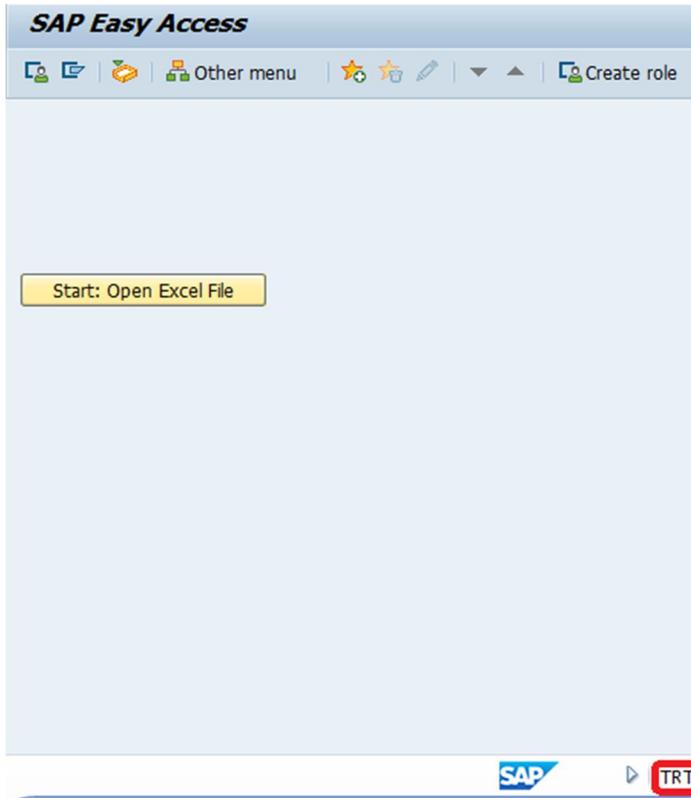

After Changes TRT vs TTX:

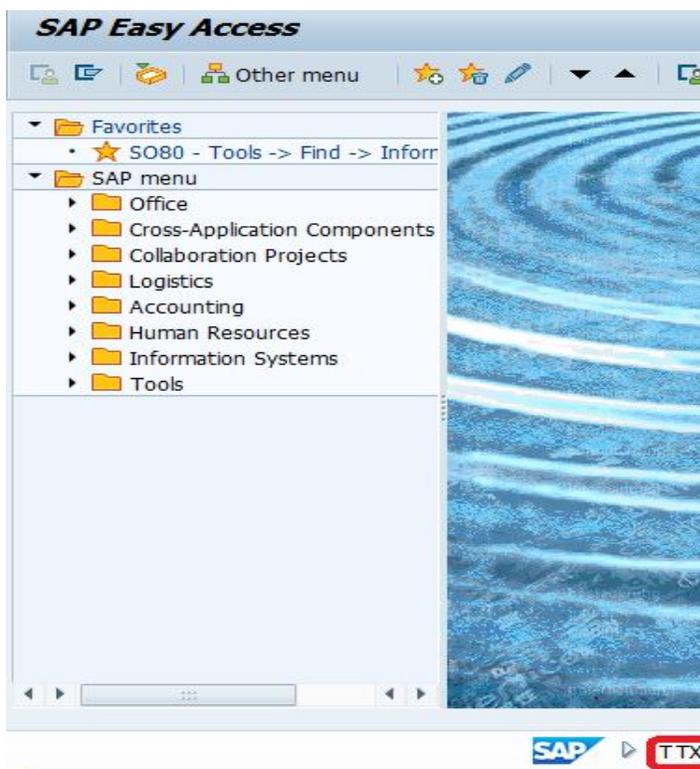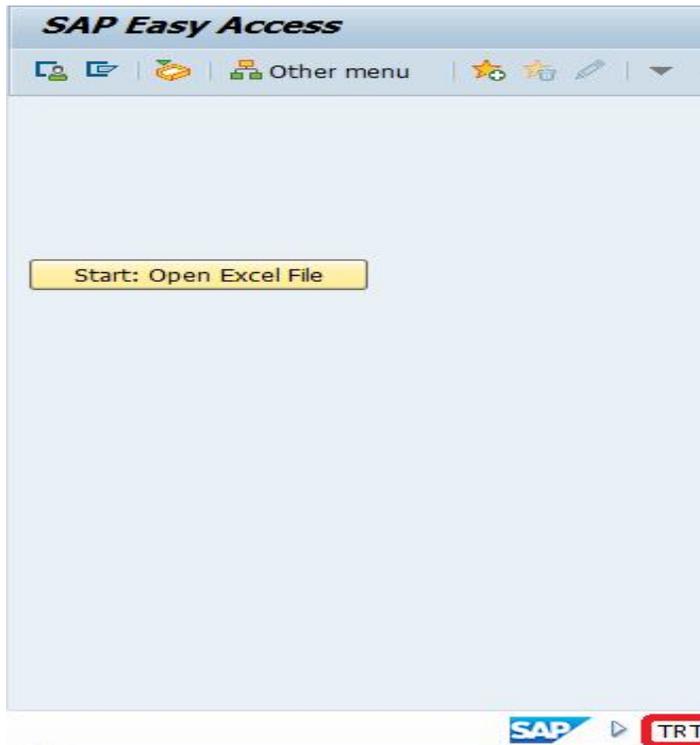

From the above figure only TRT has been provided access to the script where as TTX has been restricted for script access.