

## Using “/ws[command]” at runtime

### Purpose:

Allowing the user to execute the ws command at runtime from the transaction field.

### Syntax:

/ws[command]("argument")


The ‘command’ part is replaced by an actual WS command like ‘set’ or ‘del’.

The ‘argument’ part is replaced by the screen control name.

### Example:

If the user wants to set the ‘Order Type’ field to value ‘OR’ from the transaction field. He can follow these steps.

1. Navigate to ‘VA01’ transaction.
2. Enter /wsset(“F[Order type]”, "OR") in the transaction field and execute.

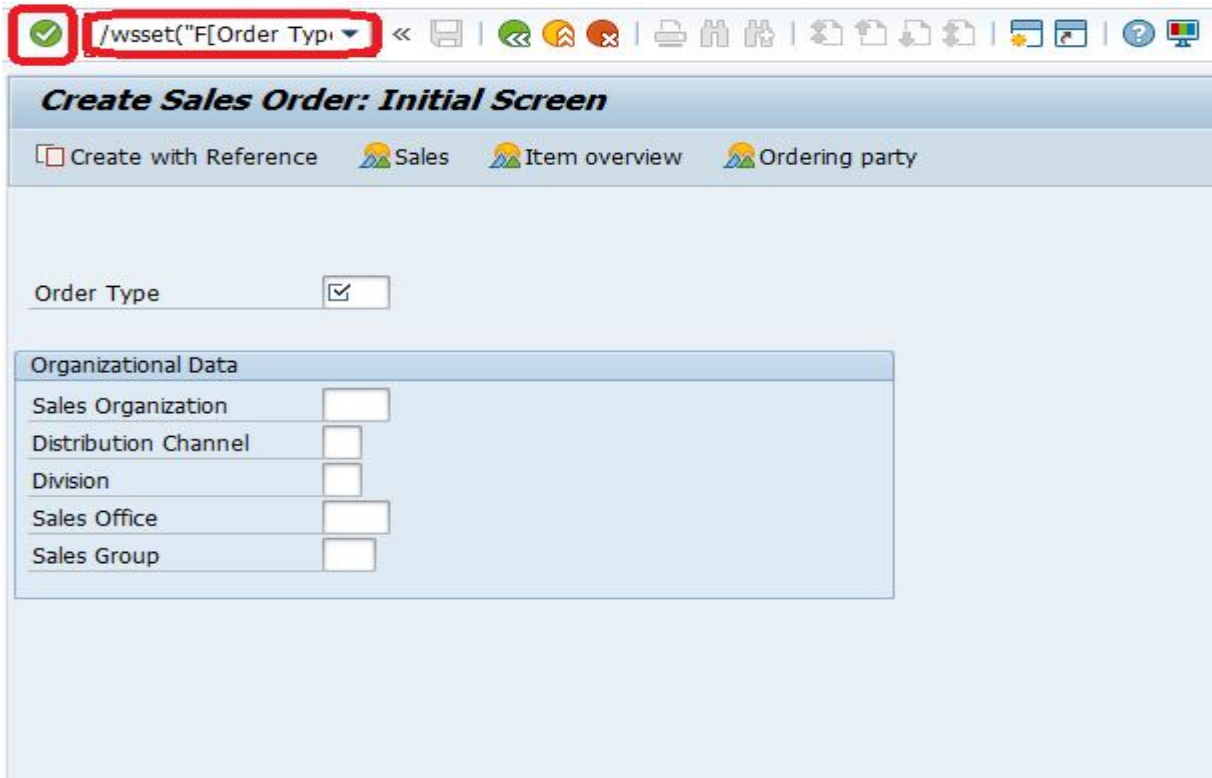


The screenshot shows the SAP VA01 transaction screen. The title bar reads "Create Sales Order: Initial Screen". Below the title bar, there are four tabs: "Create with Reference", "Sales", "Item overview", and "Ordering party". The "Sales" tab is selected. The main area contains the "Order Type" field with a dropdown arrow and a checkmark icon. Below this is a section titled "Organizational Data" with five input fields: "Sales Organization", "Distribution Channel", "Division", "Sales Office", and "Sales Group". The transaction field at the top of the screen contains the command "/wsset('F[Order Type]', 'OR')".



### Create Sales Order: Initial Screen

 Create with Reference  Sales  Item overview  Ordering party

Order Type



### Organizational Data

## Sales Organization

9

Distribution Channel

1

Division



Sales Office

10

Sales Group

